

मध्यप्रदेश ग्रामीण सड़क विकास प्राधिकरण

(म.प्र.शासन, पंचायत एवं ग्रामीण विकास विभाग के अधीन)

(म.प्र. सोसाइटी रजिस्ट्रीकरण अधिनियम 1973 के अधीन पंजीकृत संस्था : पंजीयन क्रमांक 8746/2000)

खण्ड-2, पंचम तल, पर्यावास भवन, अरेरा हिल्स भोपाल

क्र. : 17579 /22/वि-12/ग्रा.स.वि.प्रा./टी-1/465/14,

भोपाल दि. : 2 /09/2014


ADDENDUM

मध्यप्रदेश ग्रामीण सड़क विकास प्राधिकरण भोपाल द्वारा जारी एसएसआर (दिनांक 26.05.2014 से लागू) के अध्याय 5 में आयटम क्रमांक 5.17 तथा अध्याय 6 में आयटम क्रमांक 6.9 सम्मिलित करते हुए निम्नानुसार जोड़ा जा रहा है -

Item No.	Description	Unit	Rate (Rs.)
5.17	Bituminous Concrete		
	Providing and laying bituminous concrete with 40 to 60 TPH batch type hot mix plant producing an average output of 50 tonnes per hour using crushed aggregates of specified grading, premixed with bituminous binder @ 5.4 to 5.6 per cent of mix and filler, as per design mix, transporting the hot mix to work site, laying with mechanical paver finisher to the required grade, level and alignment, rolling with smooth wheeled, vibratory and tandem rollers to achieve the desired compaction as per MORTH specification clause No. 509 complete in all respects		
	(I) for Grading-I (13 mm nominal size)	cum	9,547.00
	(II)for Grading-II (10 mm nominal size)	cum	9,434.00
6.9	Cement Concrete Pavement without dowel bars		
	Construction of un-reinforced, plain cement concrete pavement, thickness as per design, over a prepared sub base /base, with 43 grade cement or any other type as per Clause 1501.2.2 M30 (Grade), coarse and fine aggregates conforming to IS:383, maximum size of coarse aggregate not exceeding 25 mm, mixed in a concrete mixer of not less than 0.2 cum capacity and appropriate weigh batcher using approved mix design, laid in approved fixed side formwork (steel channel, laying and fixing of 125 micron thick polythene film, wedges, steel plates including levelling the formwork as per drawing), spreading the concrete with shovels, rakes, compacted using needle, screed and plate vibrators and finished in continuous operation including provision of contraction , construction joints, applying debonding strips, primer, sealant and construction joints, admixtures as approved, curing of concrete slabs for 14-days,	Cum	5,537.00
	using curing compound (where specified) and water finishing to lines and grade as per drawing and Technical Specification Clause 1501.		

उपरोक्तानुसार आयटम एसएसआर (दिनांक 26.05.2014 से लागू) के अध्याय 5 एवं 6 में अतिरिक्त आयटम के रूप में जोड़ा गया है। यह ADDENDUM तत्काल प्रभाव से लागू होगा।

ध्यान रखे कि IRC-SP:62-2014 एवं MORD-2014 में स्पष्ट उल्लेख किया गया है कि यदि CC Pavement M-30 की मोटाई 200 MM तक है, तो Expantion Joint में Dowel bars की आवश्यकता नहीं है। ब्रिज एवं सीडी के Slab एवं Pavement के Joint पर ही Expantion Joint में Dowel bars का प्रयोग किया जाएगा।

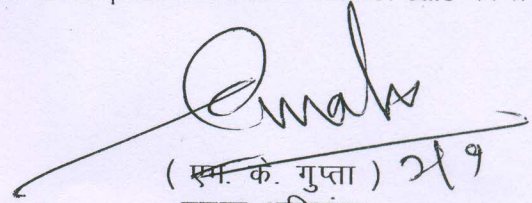

(स.के. गुप्ता) 21/9

प्रमुख अभियंता

म.प्र. ग्रामीण सड़क विकास प्राधिकरण
भोपाल (म.प्र.)

